

**APPLICATION**

- ▶ Suitable for interior top hung sliding doors.
- ▶ Ideal for residential situations where economy is of major importance.
- ▶ Suitable for a single door or for two doors on a bi-parting installation - door width limits apply.
- ▶ The track is sidewall fitted with provision for a 'hook-on' pelmet.
- ▶ All screws are the same size and length for quick selection and easy installation.

**DOOR SPECIFICATION**

**Track System:** Sprint 30

For Individual Doors:

Max Door Weight 30kg  
Max Door Width 1500mm  
Min Door Thickness 25mm

Suitable for use with lightly constructed timber framed doors of flush or panelled construction.

Provision must be made for fitting the hangers securely, since the hangers strike the door stops.

**STANDARD SETS AND PACK**

Sets comprise top track, hangers, door stops, guide, all screws and installation instructions.

Set No.	Max door width	Track length
SP3	900mm	1600mm
SP5	1500mm	2440mm

**Pack No.**  
SP1 The SP1 is a pack of fittings only, without track, for use with one SP5 set for bi-parting doors, each 720mm maximum width.

**HARDWARE SPECIFICATION**

**Track:** 160  
Material Galvanised steel  
Standard lengths 1600mm and 2440mm  
Track includes recess for 'hook-on' pelmet.

**Hanger (2 per door):** 161  
The steel hanger is zinc plated and includes a nylon tyred ballrace wheel for smooth operation.



**Door Stop:** 163  
The steel door stop is zinc plated and includes a rubber buffer. The multiple holes in the plate and the fact that the buffer is reversible, allows precise adjustment for stopping the door.

**Guide:** 101N  
The nylon guide is designed to slide through a 20mm deep by 5mm wide sawcut in the bottom rail of the door. The guide is fitted on the floor at the edge of the opening in the overlap area. The guide has lateral adjustment.

**Accessories:**  
**Pelmet and End Caps:** 164/165  
Pelmet in pearl white on zinc coated steel. Hooks onto track, no screws required. Supplied with 165 End Caps made from high impact polystyrene. The end caps are a push-fit onto the pelmet. Pelmet available in 1800mm and 3050mm lengths.

**Guide:** 102WA  
Guide in zinc plated steel, has lateral adjustment. Fits on the wall or architrave, in the overlap area, and slides through a 20mm deep by 5mm wide sawcut in the bottom rail of the door. Floor left free of hardware.

**Guide:** 103WA  
Guide in white nylon, fits on the wall or architrave, in the overlap area, no need to groove the door, since the guide supports the door faces. The guide is adjustable for doors from 35mm to 45mm thick. Floor left free of hardware.

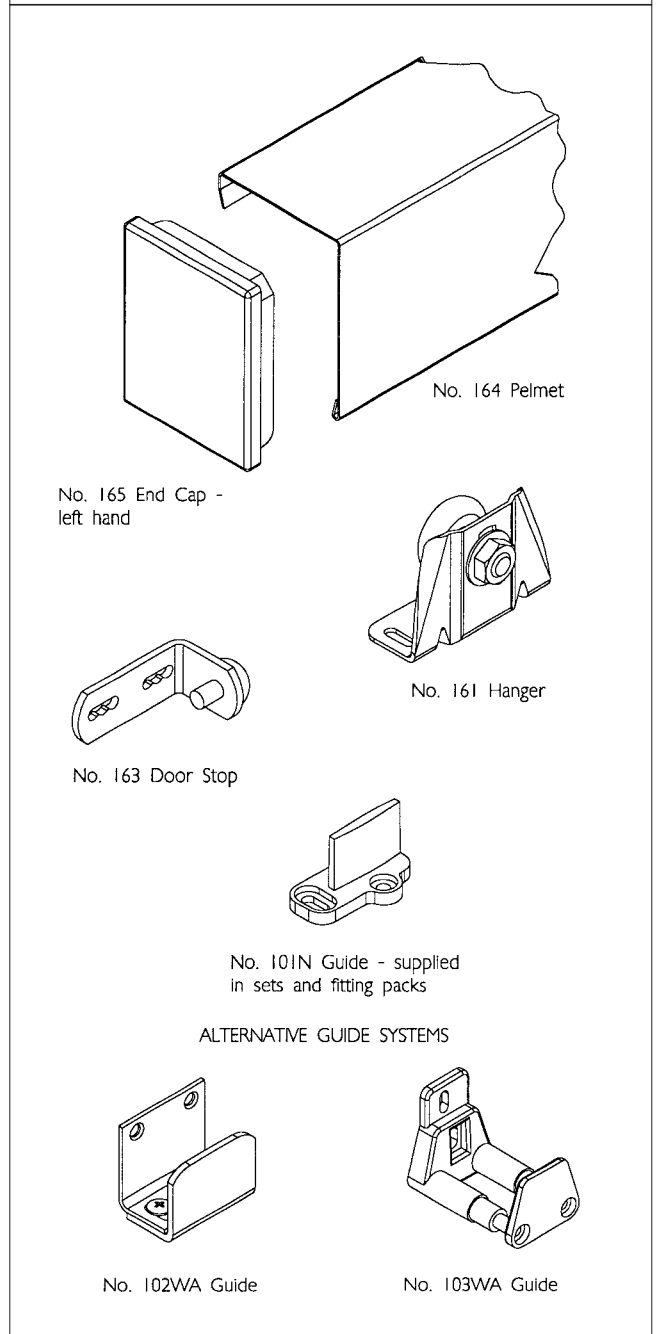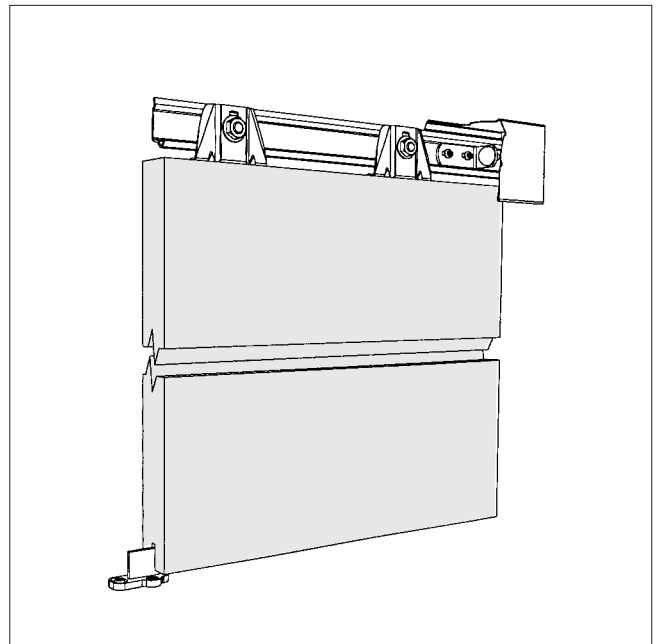


# Sprint 30

FOR TOP HUNG SLIDING DOORS, MAX. 30kg EACH

**HENDERSON**<sup>®</sup>  
SLIDING & FOLDING DOOR HARDWARE  
AUSTRALIA'S WIDEST RANGE


## INSTALLATION INSTRUCTIONS

NOTE: All screws are the same type, size and length for quick installation.

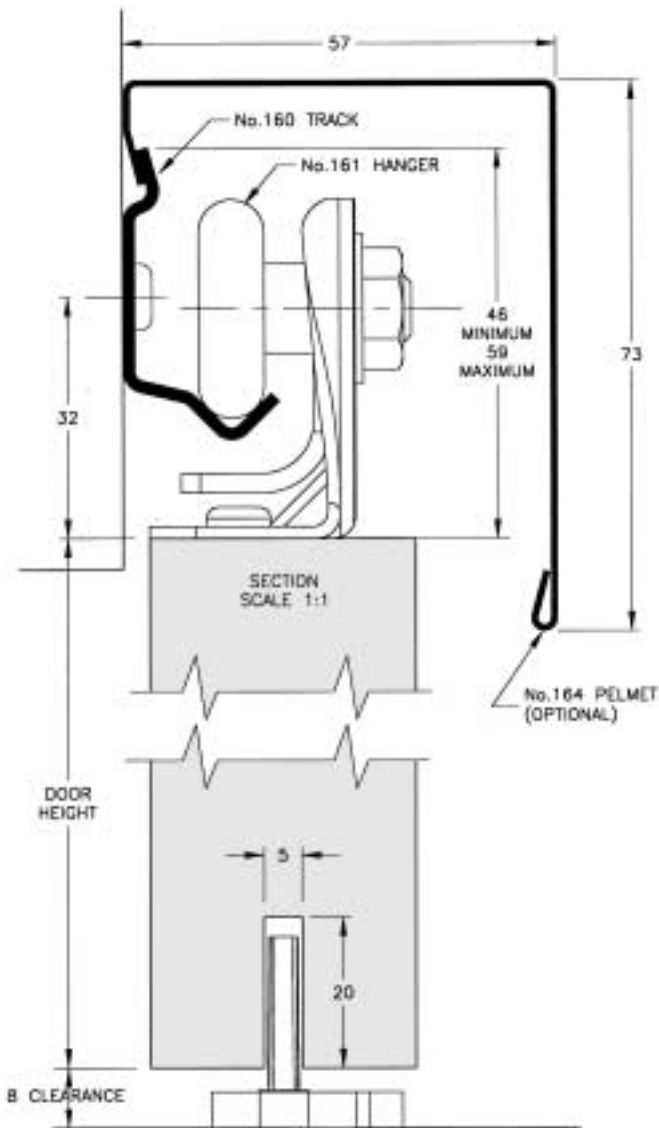


### 1 Groove Underside of Door

Groove 20mm deep by 5mm wide.




### 2 Fit Track Parallel to Floor

Add 32mm to door height and required floor clearance. This is the distance between finished floor and track screws. Position centre of Track directly in line with opening jamb. Screw Track to wall using centre four holes.




### 3 Fit Hangers to Door

Hanger Bracket should be positioned flush with inner face of door. Meas. 'x' for doors up to 1370mm equals one sixth of door width. Over 1370mm measurement 'x' equals 340mm. For Bi-Parting doors 720mm wide, fix outside hangers 220mm from edge of door and inner hanger 15mm from edge of door.




### 4 Lift Door on to Track

Loosen nut of Hanger to adjust door height. Loosen screws of Hanger Bracket to adjust side clearance.




### 5 Fit Door Guide

Locate at opening jamb. Screw through centre of slotted hole first, adjust guide so door is vertical, then locate by screwing through round hole.






### 6 Position Door Stops

Fit one stop to each end of the Track, screw through Track. With doors over 765mm on SP3 reverse the buffer so that the door will open fully.



### 7 Pelmet - Optional Extra

The Pelmet hooks onto the Track and End Caps simply "Push Fit" into position.

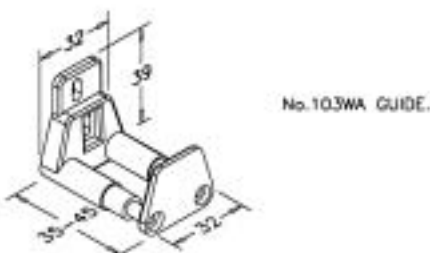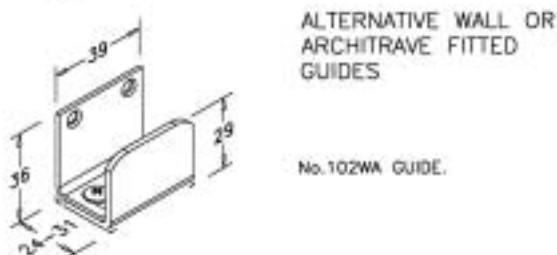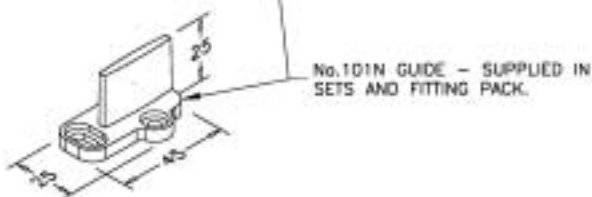

B70B

**HENDERSON RMD**

Door Hardware Division of  
RMD PRESS CO. PTY LTD.

ACN 004 313 937

© COPYRIGHT HENDERSON RMD

© HENDERSON IS A REGISTERED TRADEMARK OF PC HENDERSON LTD (UK)

